




## Copper Level wound Coil Tubing, Package on Reels

Skid Package cannot be stacked 2 high during transit or while in stock!



Skids  
(45" x 45" x 45")

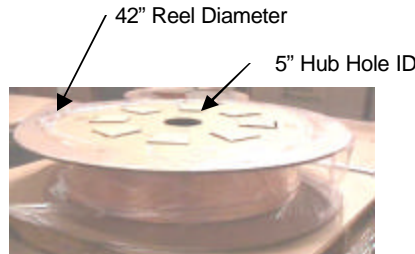

Copper LWC (Bulk) Shipping Skid Package

Individual Copper LWC on Reels

Levelwound Coils range from 1/8" to 7/8" in OD, .012" to .049" in Wall thickness and  
Tempers ranging from Hard to Soft and any where in between.

Seamless Tube, Alloy UNS C12200 DHP Copper Material meets ASTM B 68, B 75, B 743 and E243

Levelwound Copper Tube <sup>1</sup> on Cardboard Reels w/5" Hub Hole							
OD	WALL	FORM	TEMPER	OD	WALL	FORM	TEMPER
0.125	0.025	LWCR	O50 (Light Annealed)	0.500	0.030	LWCR	O60 (Soft Annealed)
0.1575	0.0288	LWCR	O50 (Light Annealed)	0.500	0.032	LWCR	O60 (Soft Annealed)
0.250	0.028	LWCR	O60 (Soft Annealed)	0.500	0.035	LWCR	O60 (Soft Annealed)
0.250	0.030	LWCR	O60 (Soft Annealed)	0.500	0.035	LWCR	O50 (Light Annealed)
0.250	0.032	LWCR	O60 (Soft Annealed)	0.500	0.042	LWCR	O60 (Soft Annealed)
0.312	0.012	LWCR	O50 (Light Annealed)	0.625	0.018	LWCR	O50 (Light Annealed)
0.312	0.014	LWCR	O50 (Light Annealed)	0.625	0.020	LWCR	O50 (Light Annealed)
0.312	0.026	LWCR	O60 (Soft Annealed)	0.625	0.025	LWCR	O60 (Soft Annealed)
0.312	0.032	LWCR	O60 (Soft Annealed)	0.625	0.028	LWCR	O60 (Soft Annealed)
0.375	0.012	LWCR	O50 (Light Annealed)	0.625	0.030	LWCR	O60 (Soft Annealed)
0.375	0.014	LWCR	O50 (Light Annealed)	0.625	0.035	LWCR	O60 (Soft Annealed)
0.375	0.016	LWCR	O50 (Light Annealed)	0.625	0.042	LWCR	O50 (Light Annealed)
0.375	0.020	LWCR	O50 (Light Annealed)	0.625	0.049	LWCR	O60 (Soft Annealed)
0.375	0.022	LWCR	O50 (Light Annealed)	0.750	0.020	LWCR	O50 (Light Annealed)
0.375	0.025	LWCR	O60 (Soft Annealed)	0.750	0.025	LWCR	O60 (Soft Annealed)
0.375	0.027	LWCR	O60 (Soft Annealed)	0.750	0.028	LWCR	O60 (Soft Annealed)
0.375	0.028	LWCR	O60 (Soft Annealed)	0.750	0.030	LWCR	O60 (Soft Annealed)
0.375	0.032	LWCR	O60 (Soft Annealed)	0.750	0.032	LWCR	O60 (Soft Annealed)
0.500	0.016	LWCR	O50 (Light Annealed)	0.750	0.035	LWCR	O60 (Soft Annealed)
0.500	0.017	LWCR	H04 (Hard)	0.875	0.032	LWCR	O60 (Soft Annealed)
0.500	0.017	LWCR	O50 (Light Annealed)	0.875	0.035	LWCR	O60 (Soft Annealed)
0.500	0.018	LWCR	O50 (Light Annealed)	0.875	0.038	LWCR	O60 (Soft Annealed)
0.500	0.020	LWCR	O50 (Light Annealed)	0.875	0.041	LWCR	O60 (Soft Annealed)
0.500	0.025	LWCR	O50 (Light Annealed)	0.875	0.045	LWCR	O60 (Soft Annealed)
0.500	0.028	LWCR	O60 (Soft Annealed)	0.875	0.049	LWCR	O60 (Soft Annealed)

<sup>1</sup> Custom O.D., Wall and or Tempers can be quoted as required.

· Individual Levelwound Coils, in Reel form, are stacked one atop one another with cardboard Reels & Hubs mounted. Then the entire assemblage is plastic wrapped onto a skid. Coils are either 12" widths or 9" Widths, Coils per skid are dependant on coil width. Skids with coils of 9"width have 4 coils per skid with coils of 12" width will have 3 coils per skid.

**Dayco Industries, LLC • 10215 San Sevaine Way • Mira Loma, CA 91752**  
**Call Toll Free: (800) 893-8355 • Local: (951) 360-5900 • Fax: (951) 360-5999**  
**E-mail: sales@daycoindustries.com**